


# DIRECTIONAL FLEXING LIFE TEST

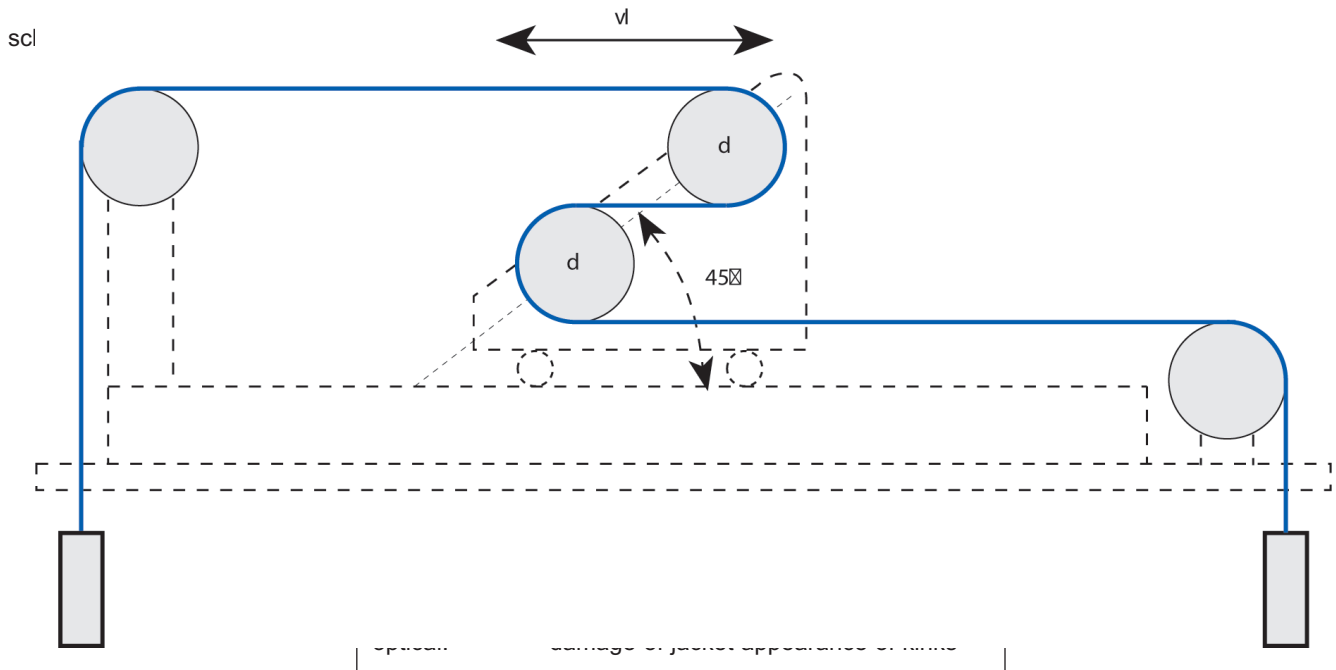

Test construction acc. to DIN VDE 0281 part 2 (HD 21.2 S3),  
for PVC insulated cables.

<b>Test parameter:</b>	Acceleration:	10 m/s <sup>2</sup> · 32.8 feet/s <sup>2</sup>
	Travel $v_l$ :	1000 mm · 39.37 inches
	Speed:	0.4 m/s · 1.31 feet/s
	No. of bendings:	12 per min